

Datasheet EE600

Differential Pressure Sensor



EE600

Differential Pressure Sensor

The EE600 is dedicated for reliable measurement of differential pressure in HVAC, building automation and filter monitoring applications. The multi-range device is suitable for air as well as all non-flammable and non-aggressive gases. Optionally, the sensor is available with auto-zero function.

Measurement Performance

The EE600 is available with full scale 1 000 Pa (4 inch WC) and 10 000 Pa (40 inch WC) and offers an outstanding accuracy of ± 0.5 % full scale. The piezoresistive, no flow-through pressure sensing element stands for outstanding long-term stability.

Analogue and Digital Outputs

The measured data is available on the analogue voltage and current output or on the RS485 interface with Modbus RTU or BACnet MS/TP protocol.

Functional and Robust

The IP65/NEMA 4X enclosure minimizes installation costs. External mounting holes allow for installation with closed cover, the electronics are thus protected against construction site damage and pollution.

Configurable and Adjustable

The setup can be easily performed with DIP switches on the electronics board (EE600 with analogue output) or with an optional adapter and the free PCS10 Product Configuration Software. The setup includes measuring range, output signal, response time, displayed units and backlight. The auto-zero interval can be set with the PCS10 The EE600 can be set up for volume flow or air velocity measurement, as well as for filter monitoring or level indication. A zero point and span adjustment can be easily performed with push buttons on the electronics board.






EE600 with backlit display

EE600 without display

www.epluse.com

Features

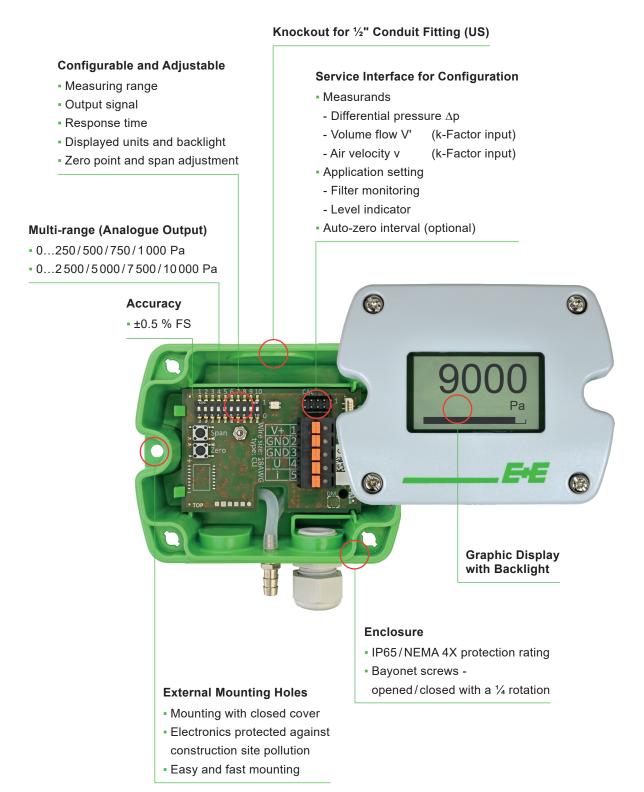


Test Report

According DIN EN 10204-2.2

Dimensions

Values in mm (inch)

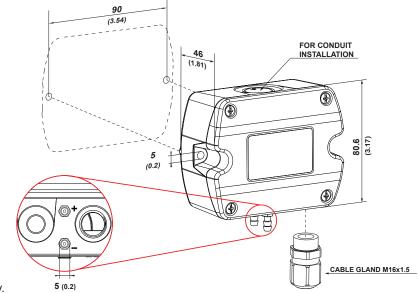

Pressure fittings Ø5 (0.2)

- + high pressure
- low pressure

Pressure connection set is included in the scope of supply.

Technical Data

Measurands

Differential Pressure (∆p)

Measurement principle	Piezoresistive, no flow-through		
Measuring range Analogue output selectable with DIP switches ¹⁾ With PCS10	0250/500/750/1000 Pa 02500/5000/7500/10000 Pa Configurable within max. measuring range		
Accuracy @ 20 °C (68 °F), incl. hysteresis, non-linearity and repeatability	±0.5 % FS FS Fs Full scale (1000 Pa or 10000 Pa)		
Temperature dependency, typ.	<0.03 % from FS/K		
Response time t_{90}	50 ms/500 ms/2 s/4 s selectable with DIP switches Configurable in the range from 0.05 to 30 s with PCS10 Configurable in the range from 0.5 to 30 s with PCS10		
Auto-zero interval	24 h (factory setting) Configurable between 10 min and 7 days with PCS10. Can be deactivated.		
Long-term stability	<0.5 % FS/year		
Overload limits 1 000 Pa FS 10 000 Pa FS	±10 000 Pa ±80 000 Pa		

¹⁾ Factory setup analogue output: measurement range 0...100 % FS; response time t₉₀: 50 ms; displayed unit: Pa; display backlight: on; analogue outputs: 0 - 10 V and 4 - 20 mA. Other ranges upon request.
2) Factory setup RS485: response time t₉₀: 500 ms; displayed unit: Pa; display backlight: on

Calculated measurands

		Unit
Level Indicator	LI	cm
		inch
Volume flow	V'	m³/h
		I/s
		m ³ /s
		ft ³ /min
Air velocity	V	m/s
		ft/min
Filter contamination level	FCL	%

www.epluse.com v1.9 / Modification rights reserved | 5

Technical Data

Outputs

Analogue

Analogue output ¹⁾	0 - 5 V or 0 - 10 V	-1 mA < I _L < 1 mA	I _L = load current
	and 0 - 20 mA or 4 - 20 mA (3-wire)	$R_L \le 500 \Omega$	R _L = load resistor

¹⁾ Voltage and current output signals available simultaneously at the spring loaded terminals. Settings selectable with DIP switches. Factory setup analogue outputs: measurement range 0...100 % FS; response time t₉₀: 50 ms; displayed unit: Pa; display backlight: on; analogue outputs: 0 - 10 V and 4 - 20 mA. Other ranges upon request.

Digital

Digital interface	RS485 (EE600 = 1/2 unit load)	
Protocol Factory settings Supported Baud rates Data types for measuring values	Modbus RTU Baud rate see order information, parity even, 1 stop bit, Modbus address 43 9600, 19200 and 38400 FLOAT32 and INT16	
Protocol Factory settings Supported Baud rates	BACnet MS/TP Baud rate see order information, BACnet address 43 9 600, 19 200, 38 400, 57 600 and 76 800	

General

Power supply class III (II) USA & Canada: Class 2 supply necessary, max. voltage 30 V DC	15 - 35 V DC or 24 V AC ±20 %		
Current consumption, typ.		Analogue output	Digital interface
@ 0 Pa (0 psi)/24 V DC	Without display	23 mA	8 mA
	Display with backlight	49 mA	29 mA
Electrical connection Analogue output Digital interface	Spring-loaded terminals, max. 1.5 mm² (AWG16) Screw terminals, max. 2.5 mm² (AWG14)		
Cable gland	M16x1.5		
Display	Graphic, with backlight		
Selectable units on display with Analogue output via DIP switch Analogue output and digital interface via PCS10	Pa, kPa, mbar, mm $\rm H_2O$ Pa, kPa, mbar, mm $\rm H_2O$, inch WC, $\rm m^3/h$, $\rm m^3/s$, $\rm ft^3/min$, $\rm l/s$ m/s, ft/min, %		
Humidity range	095 %RH, non-condensing		
Temperature range Operation Storage	-20+60 °C (-4+140 °F) -40+70 °C (-40+158 °F)		
Enclosure Material Protection rating	Polycarbonate, UL94 V-0 (with display UL94 HB) approved IP65/NEMA 4X		
Electromagnetic compatibility	EN 61326-1 EN 61326-2-3 Industrial environment FCC Part15 Class A ICES-003 Class A		
Shock and vibration	Tested according to EN 60068-2-64 and EN 60068-2-27		
Conformity	CE CA		

www.epluse.com v1.9 / Modification rights reserved | 6

Technical Data

Configurability

Device	DIP switches	PCS10
Analogue output without auto-zero	✓	
Analogue output with auto-zero	✓	✓
Digital interface without auto-zero	✓	✓
Digital interface with auto-zero	✓	✓

Configuration options see above or manual at www.epluse.com/ee600.

Ordering Guide

Feature		Description	Code	
<u>_</u>			EE6	600-
atio	Measuring range ¹⁾	01000 Pa (04 inch WC, 010 mbar, 01 kPa)	HV52	
<u>-</u>		010 000 Pa (040 inch WC, 0100 mbar, 010 kPa)	HV53	
ıfig	Output	Analogue (voltage and current output)	A7	
configu		RS485		J3
_	Display	Without display	No code	
ardware		Display with backlight	D2	
ard	Auto-zero	Without auto-zero	No code	
Ξ̈́		Auto-zero	AF8	
	Protocol	Modbus RTU ²⁾		P1
setup		BACnet MS/TP ³⁾		P3
set	Baud rate	9600		BD5
Software		19 200		BD6
		38 4 0 0		BD7
Sof		57 600 (for BACnet MS/TP only)		BD8
,		76 800 (for BACnet MS/TP only)		BD9

- 1) Measuring ranges 0...25 %/50 %/75 %/100 % FS, selectable with DIP switches at analogue output or PCS10.
 2) Factory setting: Even parity, 1 stop bit; Modbus Map and communication setting: See User Manual and Modbus Application Note at
- www.epluse.com/ee600.

 3) Factory setting: No parity, 1 stop bit; Product Implementation Conformance Statement (PICS) available at www.epluse.com/ee600.

www.epluse.com

Order Examples

EE600-HV52A7

Feature	Code	Description
Measuring range	HV52	01000 Pa (04 inch WC, 010 mbar, 01 kPa)
Output	A7	Analogue (voltage and current output)
Display	No code	Without display
Auto-zero	No code	Without auto-zero

EE600-HV53J3D2AF8P1BD5


Feature	Code	Description
Measuring range	HV53	010 000 Pa (040 inch WC, 0100 mbar, 010 kPa)
Output	J3	RS485
Display	D2	Display with backlight
Auto-zero	AF8	Auto-zero
Protocol	P1	Modbus RTU
Baud rate	BD5	9600

Accessories

For further information see datasheet Accessories.

Accessories	Code	
Pressure connection set, 2 m (6.6 ft) PVC hose with two ABS pressure connection nipples (included in the scope of supply)	HA011304	
USB configuration adapter	HA011066	
E+E Product Configuration Software (Free download: <u>www.epluse.com/pcs10</u>)	PCS10	

www.epluse.com v1.9 / Modification rights reserved | 8

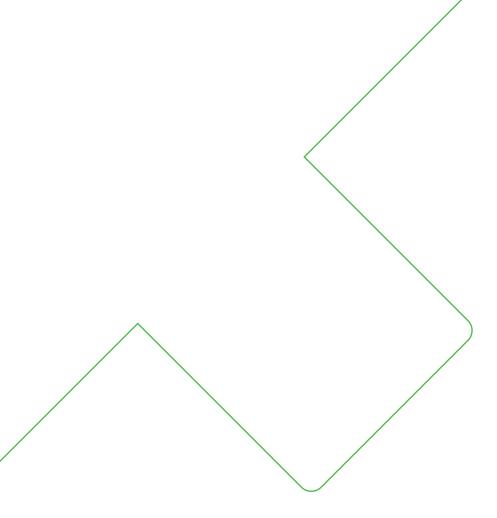

Company Headquarters & Production Site

E+E Elektronik Ges.m.b.H.

Langwiesen 7 4209 Engerwitzdorf | Austria T +43 7235 605-0 F +43 7235 605-8 info@epluse.com www.epluse.com

Subsidiaries

E+E Sensor Technology (Shanghai) Co., Ltd. T +86 21 6117 6129

info@epluse.cn

E+E Elektronik France SARL

T +33 4 74 72 35 82 info.fr@epluse.com

E+E Elektronik Deutschland GmbH

T +49 6171 69411-0 info.de@epluse.com

E+E Elektronik India Private Limited T +91 990 440 5400

info.in@epluse.com

E+E Elektronik Italia S.R.L.

T +39 02 2707 86 36 info.it@epluse.com

E+E Korea Co., Ltd. T +82 31 732 6050

info.kr@epluse.com

E+E Elektronik Corporation T +1 847 490 0520

info.us@epluse.com



your partner in sensor technology.